

熊本地震後の異常水位上昇のタンクモデル解析

Tank model analysis of coseismic groundwater-level increasing induced by 2016 Kumamoto Earthquake

*利部 慎¹、井手 淨²、細野 高啓²、中川 啓¹、嶋田 純³

*Makoto Kagabu¹, Kiyoshi Ide², Takahiro Hosono², Kei Nakagawa¹, Jun Shimada³

1. 長崎大学 環境科学部、2. 熊本大学大学院 大学院先導機構、3. 熊本大学名誉教授

1. Faculty of Environmental Science, Nagasaki University, 2. Priority Organization for Innovation and Excellence, Kumamoto University, 3. Emeritus Professor, Kumamoto University


After the 2016 Kumamoto Earthquake, the amount of spring water in the Suizenji Park was greatly reduced and faced a depletion crisis, while groundwater level at the observation wells showing a drastic rise. In this study, this groundwater level rising was evaluated using a tank model to distinguish whether it was caused by the earthquake. This model were applied to regionally distributed groundwater observation wells to clarify the spatial distribution characteristics.

A tank model was constructed to explain groundwater level data recorded at the observation wells. The amount of daily precipitation subtracted from the evapotranspiration estimated by the Thornthwaite method in each month were used as effective input amounts to the first tank. Also, since paddy fields are expected to recharge groundwater during the paddy irrigation period from May to October, we added paddy tank. The water level in the third tank was regarded as the groundwater level, and the parameter value was adjusted in each observation well so as to explain the measured groundwater level.


By constructing a tank model that explain the long-term actual groundwater level (measured value) over the past two years until the Kumamoto earthquake occurs, the difference from the measured and calculated value was evaluated as the extent of coseismic groundwater level increase. The coseismic groundwater level rise was found to be particularly large on the east side of the epicenter.

キーワード：2016年熊本地震、地下水位、タンクモデル解析、地震後の異常水位上昇

Keywords: 2016 Kumamoto earthquake, Groundwater level, Tank model analysis, Coseismic groundwater level rise

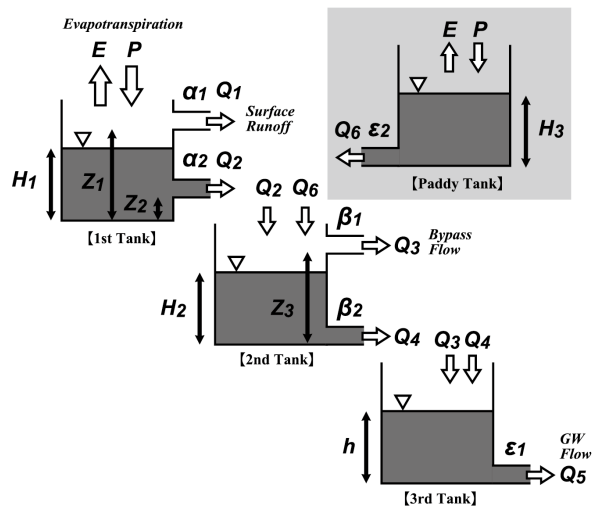

[Tank model structure]

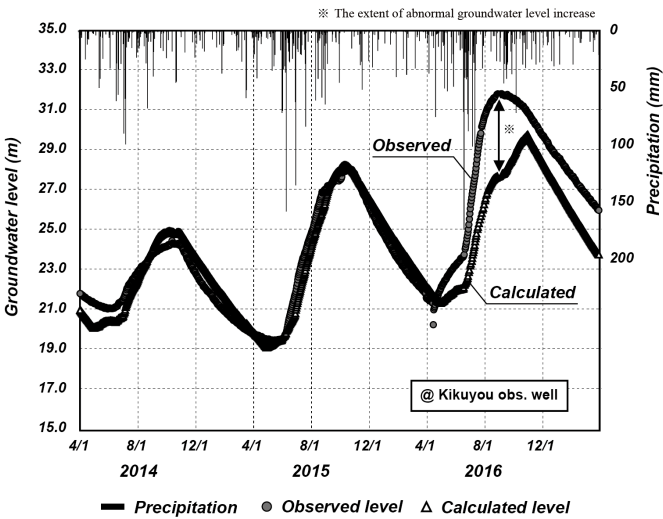

[The measured and calculated groundwater level change]