

漂流フロートによる津波起因水中圧力変化観測

Drifting float measurement of pressure change by tsunami

*大林 政行¹、綿田 辰吾²、杉岡 裕子³

*Masayuki Obayashi¹, Shingo Watada², Hiroko Sugioka³

1. 独立行政法人海洋研究開発機構 地球深部ダイナミクス研究分野、2. 東京大学地震研究所、3. 神戸大学理学研究科惑星学専攻

1. Japan Agency for Marine-Earth Science and Technology, 2. Earthquake Research Institute, University of Tokyo, 3. Department of Planetology, Kobe University

Recently a new instrument, named MERMAID (Mobile Earthquake Recording in Marine Areas by Independent Divers), was developed to measure acoustic signals converted from seismic waves at the seafloor. The MERMAID is a Lagrangian drifter equipped with a hydrophone and drifts passively at 1,500 –2,000 m depth until an earthquake signal is detected. If this is identified as a strong P wave, the MERMAID ascends at speed of 10 cm/s for transmission of the recorded waveform within time window of a hundred seconds before and after the P wave arrival as well as its global positioning system (GPS) coordinates at the surface. After transmitting the data via satellite links, the MERMAID descends at speed of 5 cm/s to monitor earthquake signals at 1,500 –2,000 m depth again.

It was reported that tsunamis were recorded by hydrophones (e.g. Okal et al., 2007), notably in frequency bands extending outside the range of the Shallow Water Approximation. If MERMAID floats can cover the oceans as dense as the Argo project of which almost 4000 floats are now drifting to measure temperature and salinity in the oceans, we acquire valuable tsunami data. Here we estimate what signals are observed by a MERMAID, by comparing to the pressure change of the 2010 Chile Tsunami measured by a differential pressure gauge (DPG) at about 4800 m deep seafloor.

We assume linearized water wave with period T , amplitude H , and phase velocity c as shown in Figure 1. Phase velocity c is given by $c = (g \tanh(kD) / k)^{1/2}$, where k is horizontal wavenumber $k = \omega / c$, $\omega = 2\pi / T$ is angular frequency and g is gravity. The wavenumber $k(\omega, D)$ of the water waves in a constant depth ocean as a function of a wave period is obtained by the recursion equation. The water wave height $W(x, t)$ as the function of time t and horizontal position x is expressed as

$$W(x, t) = H e^{i(kx - \omega t)}$$

The MERMAID is Lagrangian float drifting at a depth of z ($0 > z > -D$) and measures Lagrangian pressure of water, where D is water depth.

Lagrangian pressure $\delta p(x, z, t)$ is given by

$$\delta p(x, z, t) = -\{H \rho_0 g \sinh(kz) / (\sinh(kD) \cosh(kD))\} e^{i(kx - \omega t)}$$

Eulerian pressure is given by

$$p'(x, z, t) = \{H \rho_0 g \cosh(k(D+z)) / \cosh(kD)\} e^{i(kx - \omega t)}$$

Therefore, pressure measured by a DPG at seafloor is expressed as

$$p'(x, -D, t) = \{H \rho_0 g / \cosh(kD)\} e^{i(kx - \omega t)}$$

and the pressure $\delta p(z)$ measured by a MERMAID at z depth can be related

with the DPG pressure $p'(-D)$ by

$$\delta p(z) = R p'(-D), R = -\sinh(kz) / \sinh(kD)$$

If T is large enough that k is close to 0, R becomes close to z/D . Figure 2 shows the R as the function of T for floats at 1000 (blue) and 2000 (red) m depth, suggesting the R acts as a low-pass filter. Figure 3 shows the predicted pressure changes observed floats drifting at 1000 (blue) and 2000 (red) m depth. In the presentation, we will discuss availability of tsunami measurement by a float.

キーワード：津波、フロート、ハイドロフォン、差圧計

Keywords: tsunami, float, hydrophone, differential pressure gauge

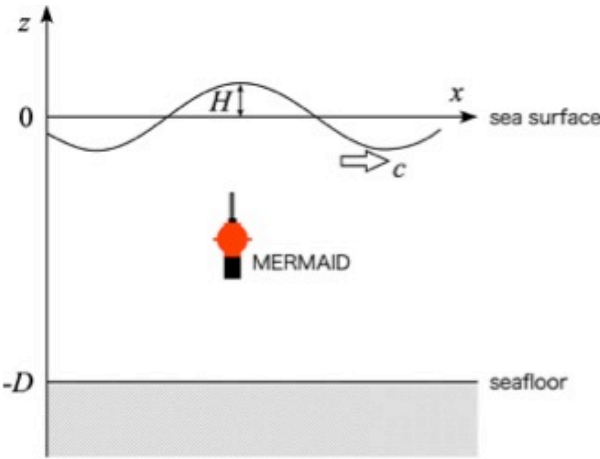


Figure 1. Problem setting

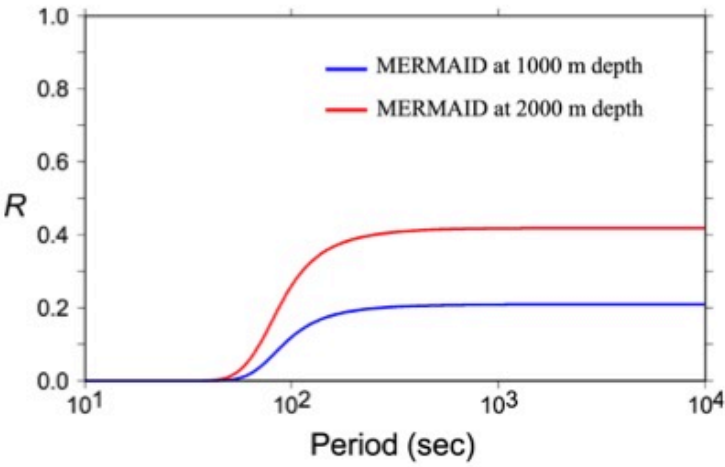


Figure 2. R as the function of period T

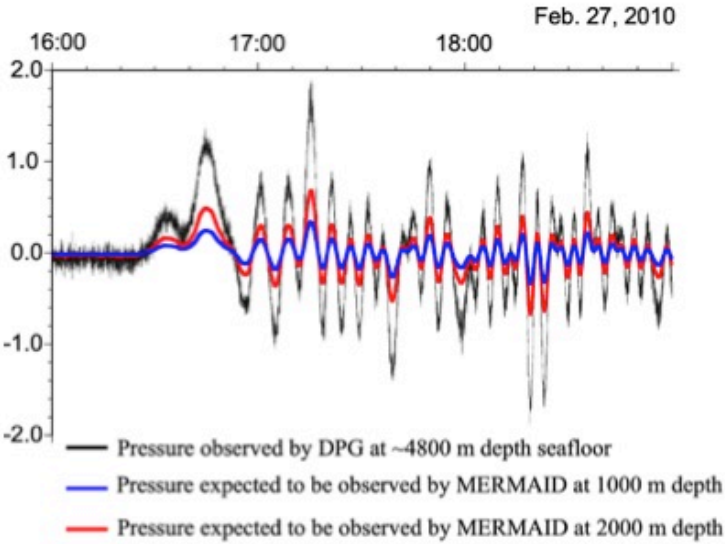


Figure 3. Predicted pressure changes observed by MERMAIDS at 1000 and 2000 m depth.