

単結晶酸化物ナノワイヤのナノ熱物性を活用した分子センサ



Nanowire Molecule Sensor via Nanoscale Thermal Management

¹ 九大先導研 Meng Gang¹, 長島 一樹¹、金井 真樹¹、○柳田 剛¹

Kyusyu Univ., Keio Univ., Meng Gang, Kazuki Nagashima, Masaki Kanai, Takeshi Yanagida

E-mail: yanagida@cm.kyusyu-u.ac.jp

Integrating sensors for volatile molecule species into portable electronic devices is strongly desired for forthcoming sensor network society. However, high energy consumption (\sim mJ) and high temperature (\sim 300°C) required for operating conventional gas sensors have been bottleneck issues to apply these for CMOS electronics and also emerging wearable electronics. Here we demonstrate a rational sensing methodology, which substantially reduces the energy consumption of gas sensors down to \sim pJ/sec. Our methodology utilizes (1) a pulse self-Joule heating of suspended SnO_2 nanowire [1-2] device and (2) the short thermal relaxation time down to microseconds. These features allow us to sense volatile molecules at the energy consumption of \sim pJ/sec via heating only the local sensing part up within a short time by applying a pulse voltage. We show the feasibility of the present methodology for sensing NO_2 (100ppb) by applying a pulse voltage down to microseconds. Surprisingly, the sensitivity can be significantly enhanced by utilizing the present pulse method when compared with conventional continuous heating method. Furthermore, we successfully demonstrate the applicability of the present methodology for volatile molecule sensors on flexible PEN substrate. [3]

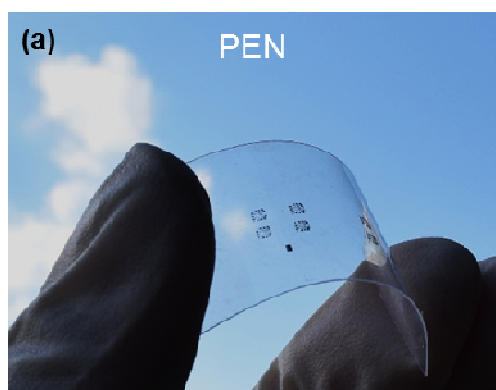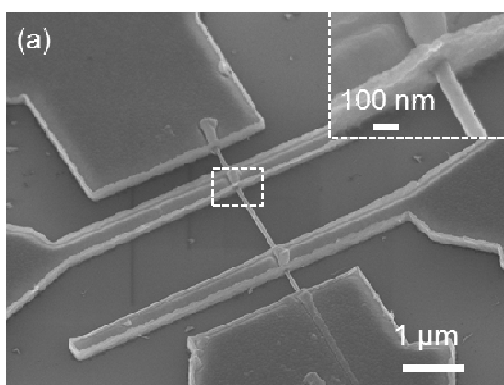

References

[1] Meng et al., *J. Am. Chem. Soc.*, 136, 14100 (2014), [2] Yanagida et al., *Nano Lett.*, 15, 6406 (2015), [3] *in submission*